




## Cart Placement Instructions Going Garbage & Recycling Inc.

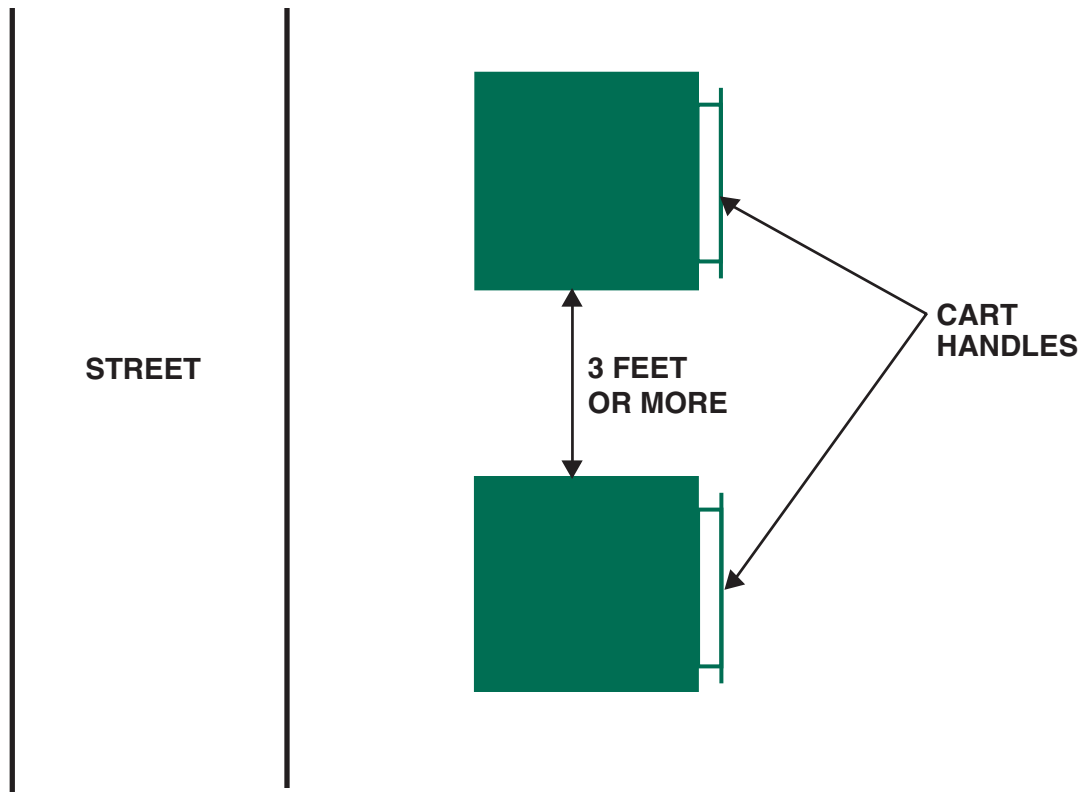

Due to the right side and overhead clearance needed for the “automated” truck to lift properly, we need to ask you to place your carts in a specific way and location as follows:

1. The cart(s) must be placed on a hard, level surface, near the road with the handle facing away from the street, with a perimeter of 3 feet clearance from any obstacles, such as mailboxes, retaining walls, ditches, snow banks, etc.
2. There must be a 15 foot overhead clearance, so please be sure that the cart(s) are not placed under any low hanging trees, power lines, etc.
3. The cart(s) cannot be more than 6 feet back from the edge of the road or street or the arm will not be able to reach it.
4. There must be no lid fasteners of any kind other than a hinged lid. Bungee cords, rocks, ropes, etc., cannot be used.
5. If there is more than 1 cart, the carts must be set side by side as indicated above with at least 3 feet between each cart.
6. The cart(s) have a maximum weight capacity indicated on the cover. Please be sure that the carts are not overfilled by weight or volume. If any item prevents the cover from not closing all the way, the container is considered overfull.
7. Extra items outside of the cart(s) will not be taken without prior authorization from you. Please contact our business office to schedule extra item pickups.

Thank you for your assistance.